

SUBMERSIBLE DEWATERING PUMPS

Model Numbers: DC10A & DC10M

DEPEND ON
DAVEY

WATER PRODUCTS

SUMP PUMPS

PRODUCT DESCRIPTION

Double cased submersible dewatering sump pump.

APPLICATIONS

- Domestic fountains or waterfalls*
- Sump emptying
- Emergency flood relief
- Water transfer
- Pumping in partially submerged applications

"A" suffix models equipped with preset length float switch for automatic operation.



FEATURES & BENEFITS

Open impeller, semi-vortex, centrifugal design

- Able to pump small soft solids in suspension
- Less susceptible to blockage

Hard faced silicon carbide / ceramic mechanical shaft seal in oil bath

- Added motor protection
- Long service life

Sand slinger lip seal

- Added protection
- Long service life

Corrosive resistant 304 stainless steel fasteners

- Long service life
- Attractive, lasting appearance

Double case with full discharge flow past internal motor shell

- Able to operate in partially submerged installations
- Better motor cooling for longer life

Automatic resetting thermal overload

- Protected against overloading

HO7RNF oil resistant leads with 3 pin power plug

- Easy to connect to power supply
- Longer life in dirty water

OPERATING LIMITS

Capacities to	80lpm
Max. total head	6m
Max. submergence	10m
Max. operating temperature	50°C
Outlet size	1" BSP(M)

Suitable Fluids:

Clean water of neutral pH containing up to 10% of small soft organic solids (<10mm OD). Some accelerated wear should be expected while pumping hard solids in suspension.

Note: Not suitable for fish ponds or aquaculture.

TECHNICAL SPECIFICATIONS

MATERIALS OF CONSTRUCTION

PART	MATERIAL
Impeller	Polycarbonate
Suction strainer	ABS
Outer casing	ABS
Pump casing	ABS - GF
Shaft seal	Silicon carbide/ceramic Mechanical seal in captive oil bath with oil seal
Shaft seal elastomer	Nitrile rubber
Pump shaft	304 stainless steel
Orings	Nitrile rubber
Motor shell	304 stainless steel
Handle	ABS
Fasteners	304 stainless steel
Float & power supply leads	HO7RN-F oil resistant

ELECTRICAL DATA

Electrical lead	HO7RNF x 6m length
Phase	Single
Supply voltage / Hz	220-240 / 50Hz
Speed	2 pole, 2850rpm
Full load current	1.0A
kW (nameplate)	0.1kW
Insulation class	Class F
IP rating	X8
Starting	P.S.C.

INSTALLATION & PRIMING

Use a rope to position and retrieve the pump. Do not lower or retrieve the pump using the power lead as this may damage the cable entry seals, causing water leaks and unsafe operation.

Don't use this product for recirculating or filtering swimming pools, spas, etc. While these pumps are built to high safety standards, they are not approved for installations where people will be in the water while they are operating.


Don't pump abrasive materials. Sand and grit in the water being pumped will accelerate wear, causing shortened pump life.

Keep your pump clean, particularly in situations where lint, hair or fibrous materials may get bound around the pump shaft. Regular inspection and cleaning will extend pump life.


Make room for the float switch to operate. Automatic models have a float switch to turn them on when the water level rises and turn them off again when it has been pumped down to the safe operating level of the pump. If the float switch is not free to rise and fall, correct pump operation may not be possible.

Don't run your pump dry. Non-automatic models must be switched off manually or by way of an external float/level switch when the water level is reduced to the top of the pump housing.

HYDRAULIC PERFORMANCE

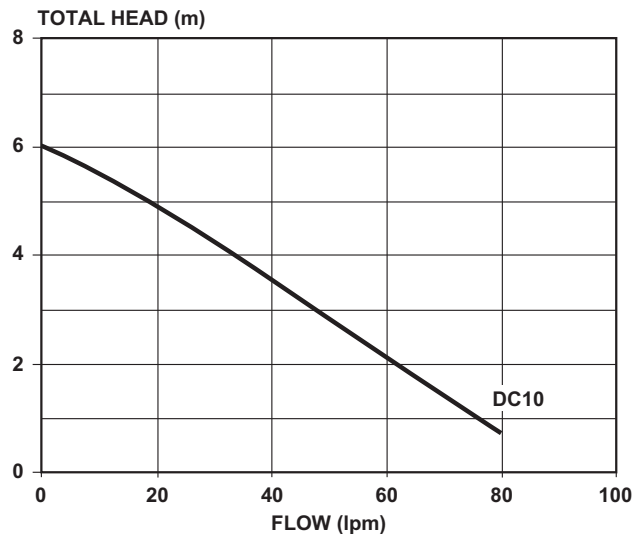

DIMENSIONS

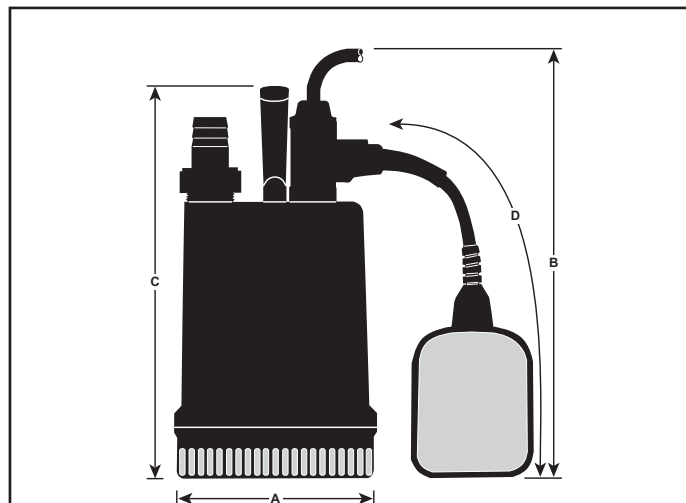

Minimum recommended pit dimensions :-
Width 200mm x Length 450mm x Height 450mm

Model	A	B	C	D	Outlet	Weight (kg)
DC10	137	320	265	250	1" BSP(M)	4

All dimensions in mm unless otherwise stated.



Davey Water Products Pty Ltd

Member of the GUD Group
ABN 18 066 327 517

AUSTRALIA
Head Office and Manufacturing
6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9222
Fax: +61 3 9753 4100
Website: davey.com.au

Customer Service Centre
Ph: 1300 369 100
Fax: 1300 369 119
E-mail: sales@davey.com.au

NEW ZEALAND
7 Rockridge Avenue,
Penrose, Auckland 1061
Ph: +64 9 570 9135
Fax: +64 9 527 7654
E-mail: sales@daveynz.co.nz
Website: daveynz.co.nz

Customer Service Centre
Ph: 0800 654 333

REST OF WORLD
6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9121
Fax: +61 3 9753 4248
E-mail: export@davey.com.au
Website: davey.com.au

